


# KL5C80A12



## FEATURES


- **CPU core:** KC80 (external 8-bit data bus internal 16-bit data path)
  - **Instruction Set:** Fully compatible with Z80 MPU at binary level
  - **High speed operation:** 10 MHz, 4 times faster than Z80 at the same clock rate
  - **Operational clock frequency:** 0-10 MHz
  - **Minimum execution time:** 100 nS (1 clock)
  - **Address space:** 512-Kbyte
  - **Timer/counter:** Event, interrupt and interval count, PWM, WDT modes
  - **Interrupt controller:** NMI and internal/external 16 levels of maskable interrupts, nested interrupt support  
Mode 2 (vector) interrupt operation
  - **Parallel port:** 1- or 4-bit wise configurable input or output direction  
Bit set/reset function
  - **Serial channel:** Full-duplex USART (X1)  
Max baud rate 2 Mbps
  - **On chip memory:** 512-byte high speed RAM (no wait accessible)
  - **External bus interface:** External bus interface unit with a wait state controller
  - **Other functions:** Clock generator and debug logic
  - **100-pin QFP package:**
  - **Software debug tool:** Target probe-type ICE, handy type debug tool 'Bug Finder', ROM-ICEs, software debug tools, simulator, and general purpose CPU boards are available from third parties.
- ◆ **Best suited for local controller for various types of embedded system.**
- ◆ **KC80 ASIC microcontrollers are also available. (Various types of peripherals, macro cells and high speed on chip ROM/RAM can be integrated.)**



## PERFORMANCE COMPARISON

Instructions	KL5C80A12	Z80
LD B, C	1 clock	4 clocks
ADD HL, BC	1 clock	11 clocks
DEC DE	1 clock	6 clocks
POP AF	3 clocks	10 clocks
JR Z, +20h	3 clocks	12 clocks

## INTERNAL BLOCK DIAGRAM

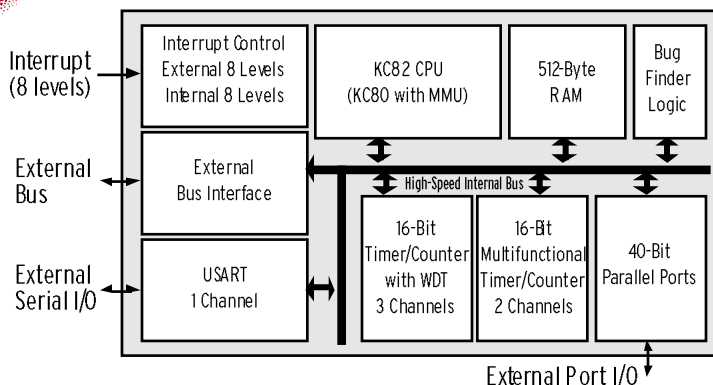

## Kawasaki LSI U.S.A., Inc.

**Silicon Valley Office:** 2570 North First Street Suite 301  
San Jose, California 95131  
Tel: 408 570-0555  
Fax: 408 570-0567

**Eastern Office:** 501 Edgewater Dr., Suite 510  
Wakefield, MA 01880  
Tel: (617) 224-4201  
Fax: (617) 224-2503